



Front of Home and House Number

1. Take a clear picture of the front of your home and be sure that your house number is visible.

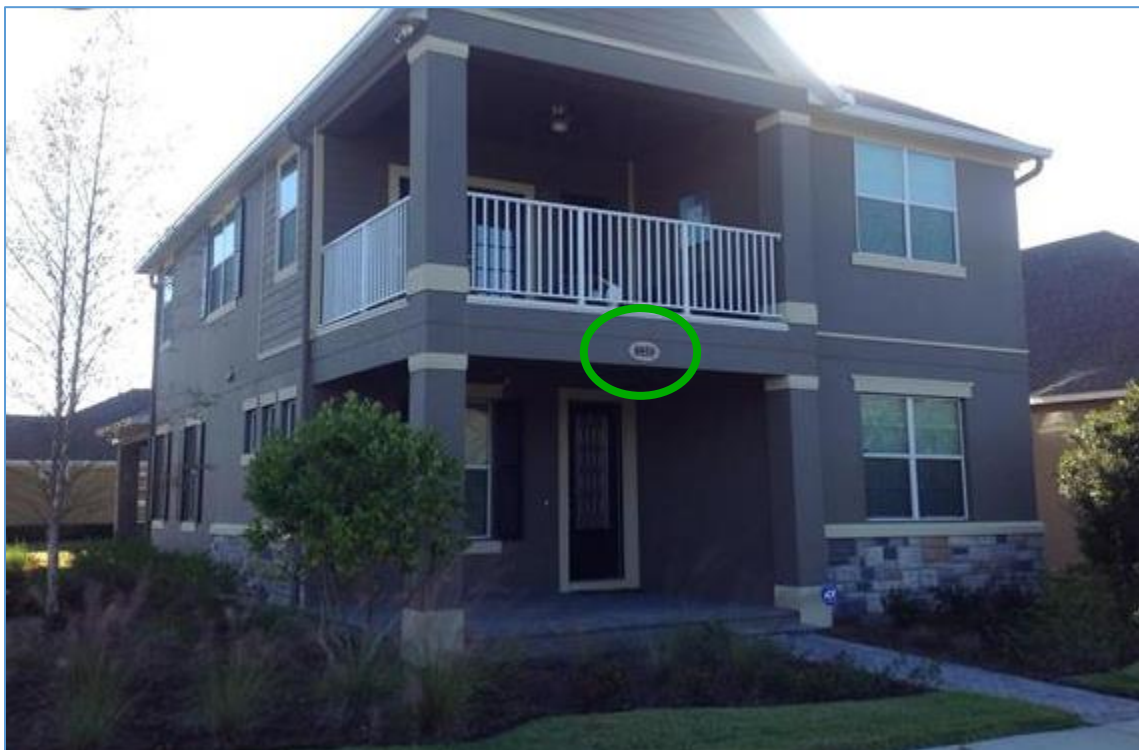

Ceiling Insulation Upgrade

1. Open the attic access and take a clear picture of the installer's insulation certificate (if available).

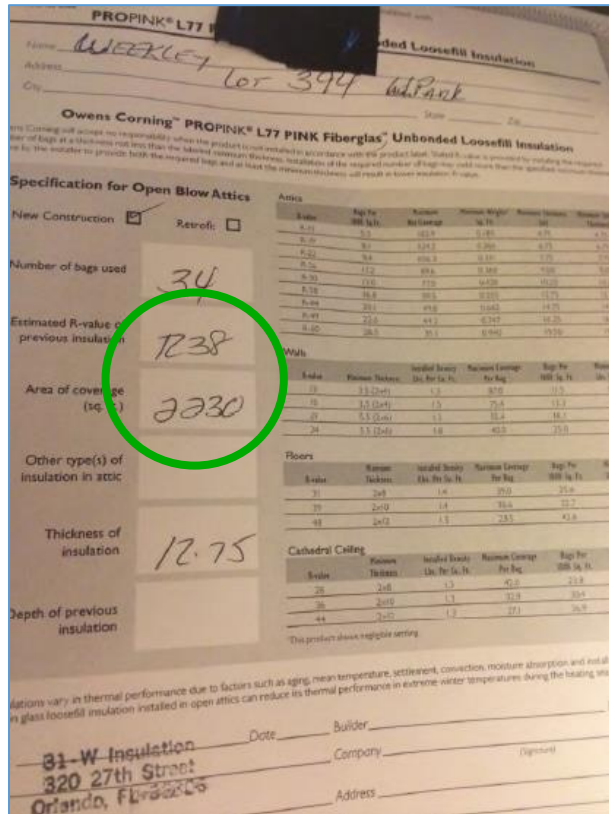

PRO-PINK® L77 PINK Fiberglass Unbonded Loosefill Insulation

Name: WEEKLEY
Address: Lot 394 W Park
City: _____ State: _____ Zip: _____

Owens Corning™ PROPINK® L77 PINK Fiberglass™ Unbonded Loosefill Insulation

Specification for Open Blow Attics

New Construction Retrofit

Number of bags used: 34

Estimated R-value of previous insulation: R38

Area of coverage (sq. ft.): 2330

Other type(s) of insulation in attic: _____

Thickness of insulation: 12.75

Depth of previous insulation: _____

Attics						
Grade	R-Value	Thickness (in.)	Number of Bags	Maximum Coverage (sq. ft.)	Minimum Coverage (sq. ft.)	Minimum Depth (in.)
R-11	3.7	11.25	127	1,170	470	4.75
R-13	4.3	12.75	150	1,350	540	5.25
R-15	4.9	14.25	173	1,557	618	5.75
R-19	6.1	17.25	213	1,917	768	7.00
R-22	6.7	18.75	237	2,133	852	7.75
R-25	7.3	20.25	270	2,430	972	8.50
R-30	8.9	24.75	327	2,943	1,188	10.25
R-38	11.2	31.25	405	3,645	1,458	12.75
R-49	14.2	40.25	513	4,617	1,848	16.25
R-60	17.2	49.25	630	5,670	2,268	19.75

Walls						
Grade	R-Value	Thickness (in.)	Number of Bags	Maximum Coverage (sq. ft.)	Minimum Coverage (sq. ft.)	Minimum Depth (in.)
R-11	3.7	11.25	127	1,170	470	4.75
R-13	4.3	12.75	150	1,350	540	5.25
R-15	4.9	14.25	173	1,557	618	5.75
R-19	6.1	17.25	213	1,917	768	7.00
R-22	6.7	18.75	237	2,133	852	7.75
R-25	7.3	20.25	270	2,430	972	8.50
R-30	8.9	24.75	327	2,943	1,188	10.25
R-38	11.2	31.25	405	3,645	1,458	12.75
R-49	14.2	40.25	513	4,617	1,848	16.25
R-60	17.2	49.25	630	5,670	2,268	19.75

Floors						
Grade	R-Value	Thickness (in.)	Number of Bags	Maximum Coverage (sq. ft.)	Minimum Coverage (sq. ft.)	Minimum Depth (in.)
R-11	3.7	11.25	127	1,170	470	4.75
R-13	4.3	12.75	150	1,350	540	5.25
R-15	4.9	14.25	173	1,557	618	5.75
R-19	6.1	17.25	213	1,917	768	7.00
R-22	6.7	18.75	237	2,133	852	7.75
R-25	7.3	20.25	270	2,430	972	8.50
R-30	8.9	24.75	327	2,943	1,188	10.25
R-38	11.2	31.25	405	3,645	1,458	12.75
R-49	14.2	40.25	513	4,617	1,848	16.25
R-60	17.2	49.25	630	5,670	2,268	19.75

Cathedral Ceilings						
Grade	R-Value	Thickness (in.)	Number of Bags	Maximum Coverage (sq. ft.)	Minimum Coverage (sq. ft.)	Minimum Depth (in.)
R-11	3.7	11.25	127	1,170	470	4.75
R-13	4.3	12.75	150	1,350	540	5.25
R-15	4.9	14.25	173	1,557	618	5.75
R-19	6.1	17.25	213	1,917	768	7.00
R-22	6.7	18.75	237	2,133	852	7.75
R-25	7.3	20.25	270	2,430	972	8.50
R-30	8.9	24.75	327	2,943	1,188	10.25
R-38	11.2	31.25	405	3,645	1,458	12.75
R-49	14.2	40.25	513	4,617	1,848	16.25
R-60	17.2	49.25	630	5,670	2,268	19.75

Date: _____ Builder: _____
Company: _____ (Signature)
Address: 31-W Insulation, 320 27th Street, Orlando, Florida

2. Take a clear picture of the insulation installed.



Heat Pump (HVAC)

1. Take a clear picture of the outdoor condenser unit(s).



2. Take a clear picture of the outdoor condenser unit(s) model and serial numbers.



3. Take a clear picture of the indoor air handler unit(s).



4. Take a clear picture of the indoor air handler unit(s) model and serial numbers.



ENERGY STAR® Heat Pump Water Heater

1. Take a clear picture of the water heater.



2. Take a clear picture of the water heater model and serial numbers.

